

Certificate

Certified Passive House component

For cool temperate climates, valid until 31 December 2017

Category: **Entry door with glazing**

Manufacturer: **Sturm GmbH**

5091 Unken, Austria

Product: **Clima Top Plus**

This certificate was awarded based on the following criteria:

Heat losses through the installed entry door:

U-value of the installed door (1.10 m wide by 2.20 m tall):

$$U_{D, \text{installed}} = 0.80 \text{ W/(m}^2\text{K)} \leq 0.80 \text{ W/(m}^2\text{K)}$$

Provided that the installation is carried out according to the certification report, available from the manufacturer.

U-value before installation: $U_D = 0.76 \text{ W/(m}^2\text{K)}$.

The U-values were calculated based on **glazing with $U_g = 0.60 \text{ W/(m}^2\text{K)}$** in accordance with EN 673 and the spacer "Super Spacer TriSeal". The glass pane should have a maximum area of 1.083 m² (67.7 x 160 cm) or a maximum circumference of 4.71 m (56 x 179,4 cm).


Airtightness:

Airtightness class 3 according to EN 12207.

The airtightness criterion has been fulfilled.

The airtightness test according to EN 1026 was carried out taking into account a maximal deformation of the door leaf, as per EN 1121. The airtightness test was carried out using a door without glazing.

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

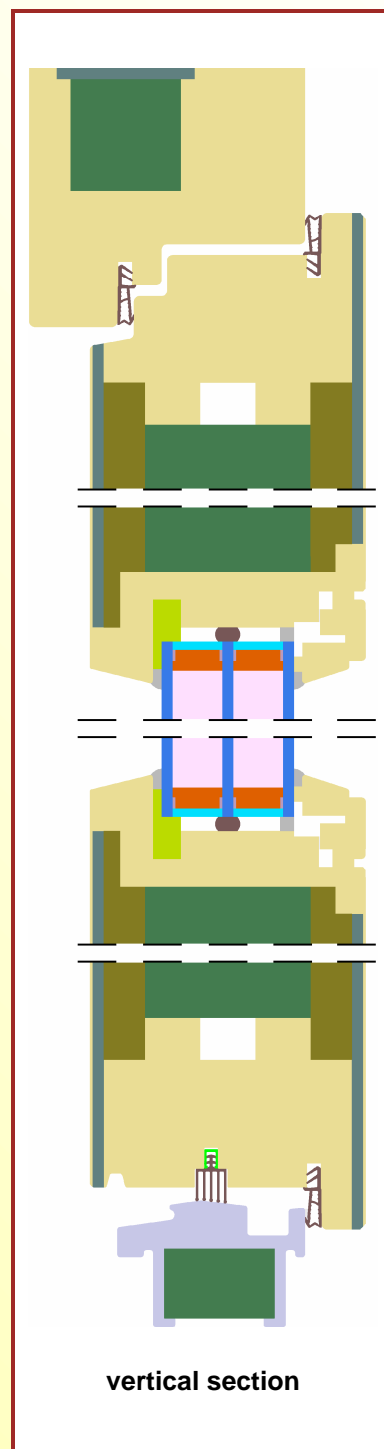

U-value entry door
including the above mentioned
glazing with $U_g = 0.60 \text{ W/(m}^2\text{K)}$

$$U_D = 0.76 \text{ W/(m}^2\text{K)}$$

For further information, please see data sheet.

www.passivehouse.com

0200ed03



**CERTIFIED
COMPONENT**

Passive House Institute